


IMPORTANT - Read all instructions before installation


- ** Installation and maintenance must be performed by qualified personnel.
- ** To avoid risk of electric shock, disconnect power at service prior to installation or maintenance.
- ** Must comply with US National Electrical Code (NEC) or Canadian Electrical Code.
- ** Connect to power source with specified voltage and frequency only.

WARNING – Risk of Electric Shock.

INSTALLATION

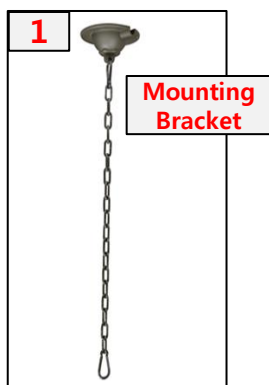

1. Make sure the mounting bracket is firmly fixed to the ceiling using 4 - M5 bolts. If the bracket cannot be secured with 4 bolts due to the ceiling structure, it is advised to use a special bracket. Must use all 4 bolts to install the mounting bracket. (Fixture may fall if only 2 or 3 bolts are used)

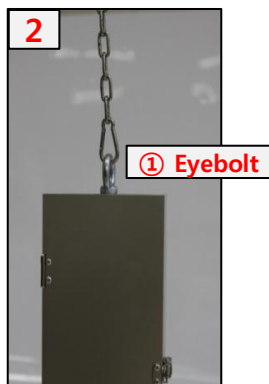


2. Lock the carabiner located at the end of the chain onto the Eyebolt(①) located on the top of the junction box. This can be done prior to Step 1 (installing the mounting bracket).




3. Carefully remove one Knock-out(②) from the junction box and insert the AC input line (using conduit if required) into the Knock-out(②).


INSTALLATION (cont'd)

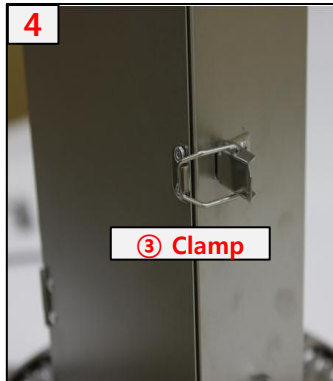

4. Unlock the Clamp(③) and open the junction box.

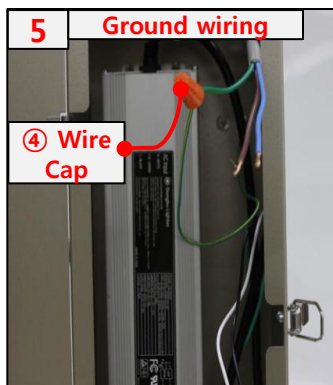

5. Connect the ground wire from the AC input line to the ground wire from the junction box using the Wire Cap(④). (wire caps included in the box)

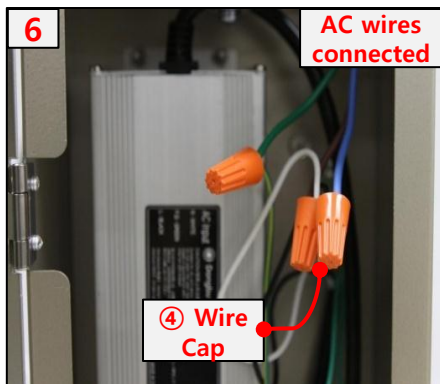

6. Connect the AC wires from the LED driver to the AC input line using the Wire Caps(④).



7. Once all connections are secured, close the junction box and lock the Clamp(③).